

Traditional Charger 12/24V




12V : 25 ▶ 160 Ah
24V : 15 ▶ 90 Ah



Ref. **024106**

- ✓ Copper wound transformer
- ✓ Clamp cables 1.5m
- ✓ Power supply cable 1.3m

- ✓ To charge lead acid batteries with liquid electrolyte:
12V: from 25 to 160 Ah
24V: from 15 to 90 Ah
- ✓ Ammeter to indicate the charge
- ✓ 2 charge speeds: Normal and "Boost".

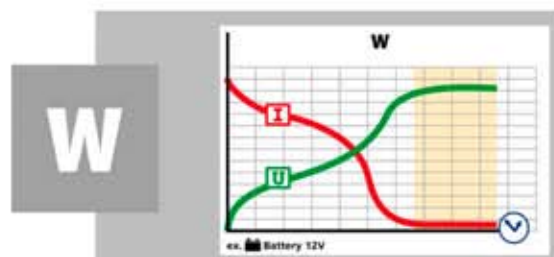

✓ Maximum protection:

- Thermal protection of the transformer
- Protection against polarity reversal with a 15A automotive fuse at the front.
- Isolated clamps
- Metallic casing

CE EN 60335-2-29

50/60Hz	190W	12V	2	EFFICACE /RMS	MOYEN/AVERAGE		FUSE	20,5x30x13,5 cm	3,9kg
					Reg 1	Reg 2			
230V	190W	12V	2	13,5A	7A	9A	15A	20,5x30x13,5 cm	3,9kg
		24V	2	7,5A	3A	5A			