

Traditional Charger 12/24V




12V : 35 ▶ 210 Ah
24V : 20 ▶ 100 Ah



Ref. **024113**

- ✓ Copper wound transformer
- ✓ Clamp cable 1.5m
- ✓ Power supply cable 1.3m

- ✓ To charge lead acid batteries with liquid electrolyte:
12V: from 35 to 210 Ah
24V: from 20 to 100 Ah
- ✓ Ammeter to indicate the charge
- ✓ 2 charge speeds: Normal and "Boost".

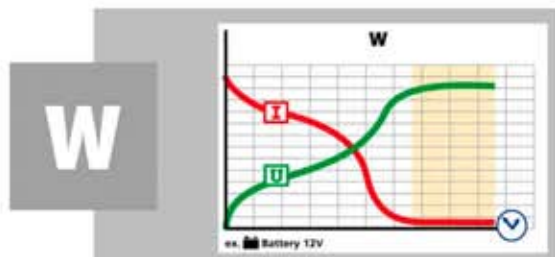

✓ Maximum protection:

- Thermal protection of the transformer
- Protection against polarity reversal with a 20A automotive fuse at the front.
- Isolated clamps
- Metallic casing

CE EN 60335-2-29

50/60Hz	260W	12V	2	EFFICACE /RMS	MOYEN/AVERAGE		FUSE	22,5x33,5x14,5 cm	5,2kg
					Reg 1	Reg 2			
230V	260W	12V	2	18A	8A	12A	20A	22,5x33,5x14,5 cm	5,2kg
		24V	2	9A	4A	6A			