

For lead-acid batteries




35 - 225 Ah



Ref. 024441

*Fuses x 10 : ref. 054523

- Free loading surveillance by automatic switching on and off
- Protection of the electronic boards
- Allows the load of the battery without disconnecting it to avoid losing in-board parameters
- Optimum protection of the battery
- 2 modes of load : « Automatic » or « Manual »
- Indicator of load by ammeter
- Indicator of the end of the load thanks to a signal
- On / off switch with light indicator
- Short circuit, overload and polarity reversal automatic protections.

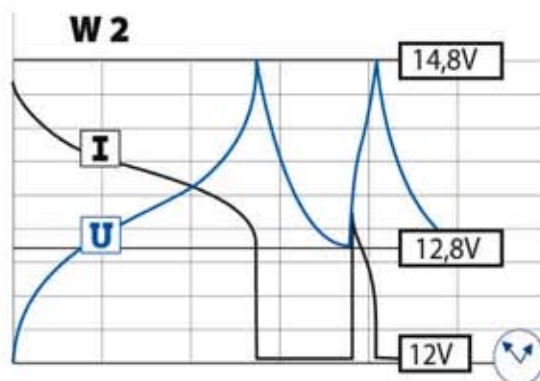

CE EN 60335-2-29



50/60Hz



700W



12-24V



2



22A

MOYEN/AVERAGE

Reg 1 Reg 2 Reg 3

8A

15A

-

FUSE



30A



36x26x14
cm



9,5 kg