

For liquid or gel electrolyte lead acid batteries



15 - 60 Ah




COMPLETELY AUTOMATIC + Battery tester

- ▶ 100% recharge with the «Floating process»
 - stop main charge at 14.8 V
 - maintenance floating at 13.8 V
- ▶ no tension on the clips, so no sparks
no risk of reversal of polarity and a buzzer shows the reversal of polarity
- ▶ Possibility to charge without disconnecting the battery
- ▶ 2 levels of charging current
- ▶ 3 led indicators for "Test" and "Charge" functions
- ▶ 1 indicator for presence of main supply
- ▶ Isolated charging clamps
- ▶ Integrated place for storing cables and clamps.



Ref. **023253**

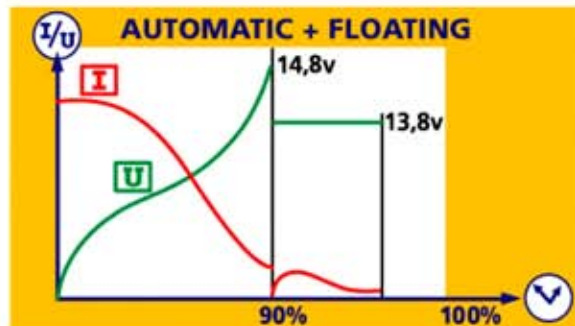

CE NORMES EUROPÉENNES - EUROPEAN STANDARDS
EUROPÄISCHE NORM - NORMAS EUROPEAS
EUROPESE NORM

CE EN 60335-2-29



50/60Hz
230V



85W



12V



2

EFFICACE
/RMS

6A

MOYEN
/AVERAGE

2-4A

START
1V/C

-

FUSE



10A



12x17x30
cm



2,7 kg