

For liquid or gel electrolyte lead acid batteries



# 15 - 90 Ah




## COMPLETELY AUTOMATIC + Battery tester

- ▶ 100% recharge with the «Floating process»
  - stop main charge at 14.8 V
  - maintenance floating at 13.8 V
- ▶ no tension on the clips, so no sparks  
no risk of reversal of polarity and a buzzer shows the reversal of polarity
- ▶ Possibility to charge without disconnecting the battery
- ▶ 2 levels of charging current
- ▶ 3 led indicators for "Test" and "Charge" functions
- ▶ 1 indicator for presence of main supply
- ▶ Isolated charging clamps
- ▶ Integrated place for storing cables and clamps.



Ref. 023260

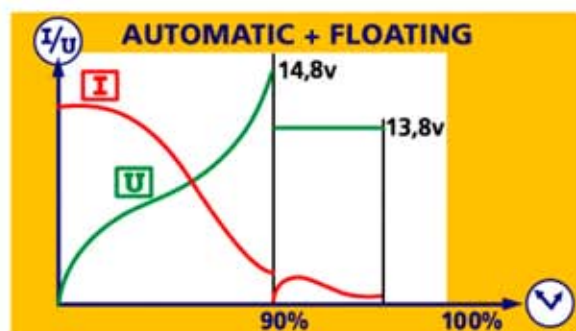

CE EN 60335-2-29



50/60Hz



120W



12V



2



8A



2-5,5A



-



15A



12x17x29  
cm



3,4 kg