

12V

Réf. **025318**

For lead-acid batteries



AUTOMATIC OR MANUAL CHARGE:

▶ In «Automatic» position, this device loads without supervision and it assures a better protection of the batteries and of the on-board electronic of the vehicle.

- Indicator of the end of the charge,

- Indicator of charge by ammeter



▶ In «Manual» position, it loads with supervision and it permits a reloading in order to restore discharged and sulphated batteries or to make rapid loadings.

START :

The position START is used for starting a car after a quick charge of the battery of about 10 minutes.

▶ Protection against short circuit, reversal of polarity and over voltage.

▶ Lighting On / Off switch

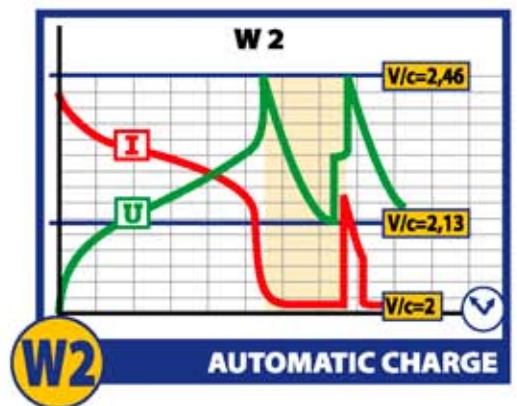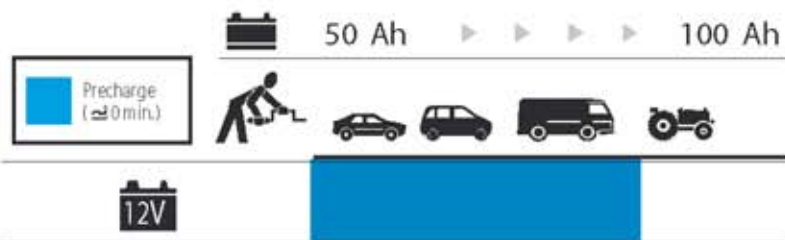

CE EN 60335-2-29

50/60Hz	I ₁	12V	Reg	EFFICACE /RMS	MOYEN /AVERAGE	AUTOMATIC	POS. MANUAL	MAX. Ah	START	FUSE	cm	kg	
						ON			A 1V/C A 0V/C				
230V	16A	12V	2	25A	17A	✓	✓	20>400	140 235	–	1x200A	24x18x35	10,1