

**12V**

Ref. **025332**

**12V**

## CHARGER

**Automatic loading** : in " Electronic control" position, this device loads without supervision and it assures a better protection of the batteries and of the on-board electronic of the vehicle.



It can be connected permanently thanks to a regulation by indication of loading. Diagnostic indicator : loading / battery loaded.

**Manual loading** : loading with supervision and manual stop by the user. It permits a reloading without voltage limitation in order to restore discharged and sulphated batteries or to make rapid loadings.

## STARTER

In «Electronic control» position, it protects the vehicle against overvoltage thanks to an automatic monitoring system which controls the excess voltage output during the start. With remote control switch.

- ▶ Mains supply protection
- ▶ Protection against short circuit, reversal polarity and over voltage
- ▶ Copper winding
- ▶ Cables  $\varnothing$  25 mm<sup>2</sup>, 2 m. Brass clips

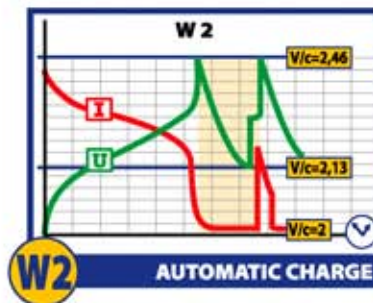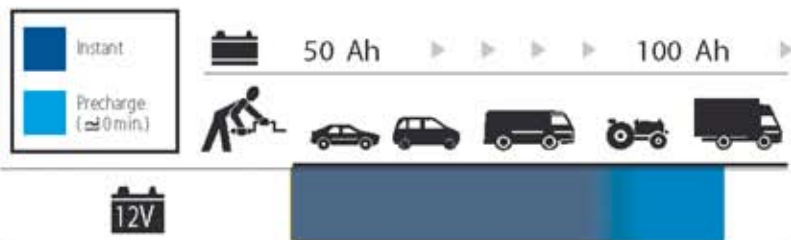

CE EN 60335-2-29

50/60Hz	I <sub>1</sub>	12V	Reg	EFFICACE /RMS	MOYEN /AVERAGE	AUTOMATIC	POS. MANUAL	MIN. MAX. Ah	START	FUSE	cm	kg
230V	16A	12V	electronic 10>45	70A	45A	✓	✓	20>1000	A 1V/C A 0V/C	1x200A	31x36,5x65	25,5
									350 600	✓		