

The T1 GYS AUTO is a three phase MIG-MAG, with torch connector, recommended for welding steel, stainless steel, aluminium and for MIG brazing of high-tensile strength steels with CuSi and CuAl wires (ideal for car body repairs).

Synergic Mode



- The machine determines the optimum wire speed by selecting :
 - the type of wire
 - the wire diameter
 - the welding current

Spool Gun connector

The Spool Gun torch is ideal for car body repairs of aluminium, AISi5 and AISi12.

4 Drive rolls motor

Suitable for $\varnothing 200\text{mm}$ and $\varnothing 300\text{mm}$ wire reels (15kg max).

Saving welding parameters

Memory save feature for each torch and activation of the 'last used' welding parameters (wire diameter, wire type & mode).

3 Welding modes available


- Standard (2T)
- Spot
- Delay



Accessories

Delivered with:
1 torch 150A - 3m
1 earth clamp - 3m
(regulator not included)

+ ADVANTAGES

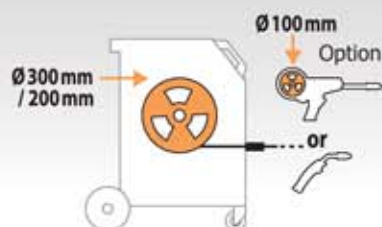

Upgradeable - the M1 GYS AUTO can be fitted with a Spool Gun torch. This motorised torch is suitable for $\varnothing 100\text{mm}$ wire reels of aluminium, stainless steel, copper and steel in $\varnothing 0.8\text{mm}$.

- Ideal for soft wire such as the AISi5 or AISi12 (recommended for car body repairs)
- Ease of use : adjusting the wire speed on the Spool Gun torch directly.

CE - EN 60974-1

50/60hz	AM	min▷max	⊘ mm	⊘ mm			⊘ mm	équipé d'origine / original equipment / originalausstattung / equipamiento de fabrica		EN60974-1 (40°C)		cm/kg	Protected & compatible POWER GENERATOR (+/- 10%)	Spool Gun
				100	200	300		Ia (60%)	X% (I2 max)					
400V	10A	15▷205A	0.6-1.0		✓	✓		0.6	0.8	110A	150A 25%	47x77x79 55	5 kVA	Option
230/400V	16/10A			0.8										