

The M1 GYS AUTO is a single phase MIG-MAG, with torch connector, recommended for welding steel, stainless steel, aluminium and for MIG brazing of high-tensile strength steels with CuSi and CuAl wires (ideal for car body repairs).

M1 GYS AUTO

Synergic Mode



- The machine determines the optimum wire speed by selecting :
 - the type of wire
 - the wire diameter
 - the welding current

Spool Gun connector

The Spool Gun torch is ideal for car body repairs of aluminium, AISi5 and AISi12.

4 Drive rolls motor

Suitable for $\varnothing 200\text{mm}$ and $\varnothing 300\text{mm}$ wire reels (15kg max).

Saving welding parameters

Memory save feature for each torch and activation of the 'last used' welding parameters (wire diameter, wire type & mode).

3 Welding modes available

- Standard (2T)
- Spot
- Delay




Accessories

Delivered with:
1 torch 150A - 3m
1 earth clamp 200A - 3m
(regulator not included)

Optional Spool Gun (ref.041486)

+ ADVANTAGES

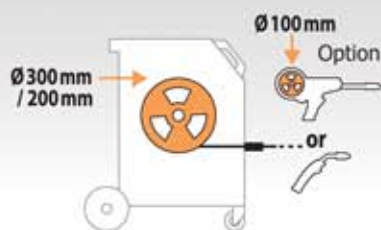

Upgradeable - the M1 GYS AUTO can be fitted with a Spool Gun torch. This motorised torch is suitable for $\varnothing 100\text{mm}$ wire reels of aluminium, stainless steel, copper and steel in $\varnothing 0.8\text{mm}$.

- Ideal for soft wire such as the AISi5 or AISi12 (recommended for car body repairs)
- Ease of use : adjusting the wire speed on the Spool Gun torch directly.

CE - EN 60974-1

50/60hz	AM	min▷max	 \varnothing mm	 \varnothing mm		équipe d'origine / original equipment / originalausstattung / equipamiento de fabrica	EN60974-1 (40°C)		 Protected & compatible POWER GENERATOR (+/- 15%)				
			\varnothing mm	100	200	300			IA (60%)	X% (Iz max)	cm/kg		Spool Gun
230V	16A	20▷160A	0.6-1.0		✓	✓		0.6 - 0.8	90A	140A 15%	47x77x79 50	4.5 kVA	Option