

Single-phase welding machine - 170A « 3 in 1 ».

- MIG/MAG
- NO GAS
- MMA

SMARTMIG 3P

On castors, ideal for private and professional individuals

Easy to use and intuitive with the "SMART" solution.



- Perfectly suited to repair, maintain and work **steel, stainless steel, cast iron and aluminium.**
- **Removable torch** to make easier the change of wire, sheath or to move it.
- Low current consumption, pluggable on a single **230V - 16A** socket
- Constant wire feeding thanks to its powerful **40W** wire feeder
- Adaptable to \varnothing **100 et 200 mm coils**
- 3 procédés :
 - **MIG/MAG** for indoor welding \varnothing **Wire 0,6 - 1,0 mm**
 - **NO GAZ** for outdoor welding \varnothing **Wire 0,9 to 1,2 mm**
 - **MMA** stick welding \varnothing **2,0 to 3,2 mm**
- Protected against overheating with its constant speed fan.



REF 033177


Supplied with an earth cable 1,6m and a 2,2m removable torch and 1,6m electrode holder

Easy and fast setting

With the Smartmig, no complicated adjustment. Thanks to the **SMART** board, it is easy to adjust the voltage (4 positions) and the wire feeding speed.

Ideal setting indicated, just select :

- the type and diameter of the wire
- the thickness of the metal sheet

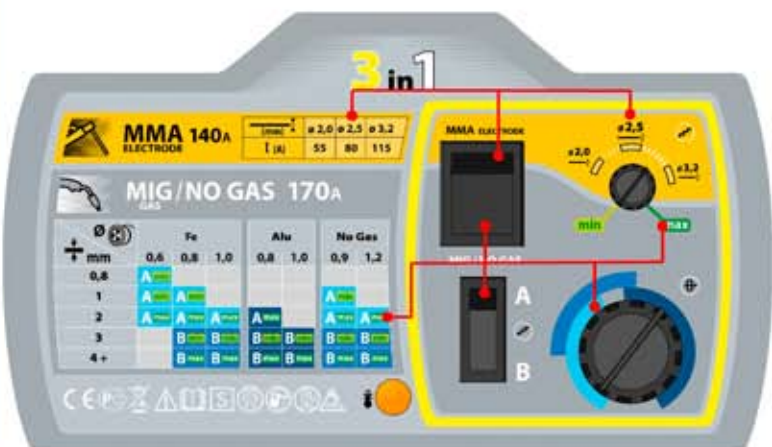

Optional handle regulator
ref. 041820 : 12L/min
ref. 041998 : 20L/min

Additional roller :
ref. 041189 : steel 0,8 / 1,0mm
ref. 041196 : aluminium 0,8 / 1,0mm

Gas nozzle:
ref.041868: special no gas for torch 150A/ \varnothing 0,9



Adjust your MIG/MAG or MMA welding parameters in few seconds with the intuitive settings

CE EN 60974-1

50/60Hz	AM	min>max	GAS NO GAS		100 200 300	Electronic Control	équipé d'origine original equipment originalausstattung equipamiento de fabrica	EN60974-1 (40°C)	U ₀	cm kg	POWER GENERATOR	
230V	16A	MIG 35>170 MMA 20>170	0,6 1,0	0,9 1,2	✓ ✓ -	0,6/0,8	0,8	MIG 70A MMA 40A	110A 25% 115A 15%	35>45 65	35x56x46cm 35kg	5,5kVA 6kVA